


TELESCOPIC BELT CONVEYOR

Our products are favored by domestic and overseas customers such as China Post, Fives, SF Express, Jingdong, UPS and DHL. We have equipment innovation, R&D, manufacturing and production, to the whole process of assembly service ability. Adhere to the "Safe, Intelligent, Efficient" R&D standards, the pursuit of providing customers with high quality services.



CUSTOMIZED


According to the requirements of the production process, we can reasonably choose the appropriate technical parameters, we can also provide you with customized services.

SAFETY

Products with front-end anti-collision devices, lighting devices, to ensure the safety of personnel in the operation process.

SERVICE

Perfect after-sales service, with professional and technical personnel for you in the use of the process to answer questions.

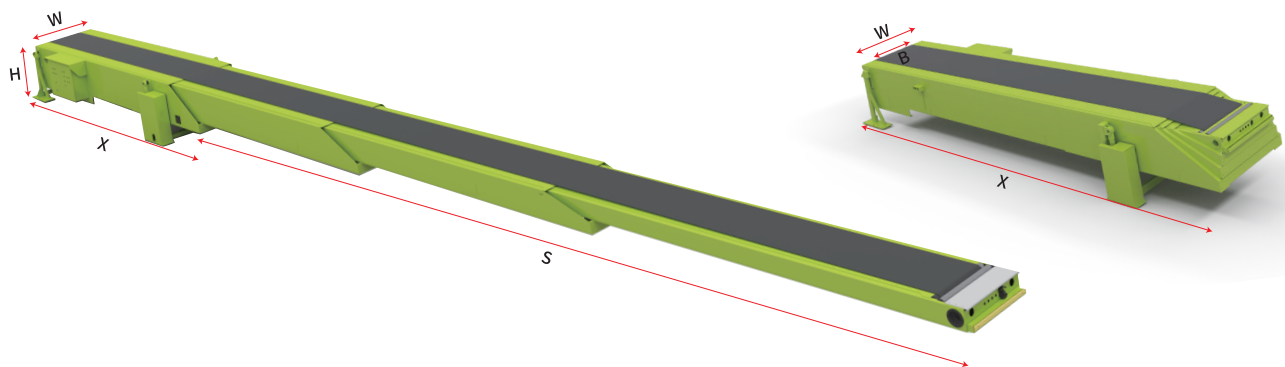

	Models	X(mm)	S(mm)	H(mm)	W(mm)	B(mm)	A°
2 SECTIONS	2 - 4.5/3	4500	3000	≥ 800	B+300	600/800	Up: ≥ 3° Down: ≥ 1°
	2 - 5/3.5	5000	3500	≥ 800		600/800	
	2 - 6/4.5	6000	4500	≥ 800		600/800	
3 SECTIONS	3 - 5.4/6.6	5400	6600	≥ 800	B+400	600/800	
	3 - 6/8	6000	8000	≥ 800		600/800	
	3 - 5/7	5000	7000	≥ 800		600/800	
	3 - 6/9	6000	9000	≥ 800		600/800	
	3 - 7/9.6	7000	9600	≥ 800		600/800	
4 SECTIONS	4 - 5.4/10	5400	10000	≥ 800	B+500	600/800	
	4 - 7/14	7000	14000	≥ 800		600/800	
	4 - 7/15	7000	15000	≥ 800		600/800	
	4 - 7.5/16	7500	16000	≥ 800		600/800	
5 SECTIONS	5 - 6/15	6000	15000	≥ 900	B+600	600/800	
	5 - 7/17	7000	17000	≥ 900		600/800	
	5 - 8/17	8000	17000	≥ 900		600/800	
	5 - 6/16	6000	16000	≥ 950,850		600/800	
	5 - 7.5/21	7500	21000	≥ 950,850		600/800	



FEATURE

Free Expansion: The conveyor is to increase the expansion mechanism on the linear belt conveyor, so that the movable section can be free expansion in the direction of length.

Optional Loading and Unloading: You can choose the direction of cargo transportation according to demand.

Telescopic Length Adjustable: You can adjust the button according to their own requirements, at any time to control the length of the conveyor.

Height Adjustable: With hydraulic lifting function can control the conveyor lifting to different heights.

PARAMETER

Belt width: 650mm/800mm/1000mm (Can be customized)

Conveying speed: $V=25-45\text{m/min}$ (Speed control with frequency conversion)

Extension velocity: $V=10\text{m/min}$ (Speed control with frequency conversion)

Running direction: Two-way operation

Power parameter: Conveyor motor: 2.2KW (two-sections&three-sections), 3KW (four-sections), 4KW (five-sections); Telescopic motor: 0.55KW/0.75KW /1.1KW (With brake)

Hydraulic system: Double cylinder drive

Hydraulic pump motor power: 2.2KW/3.0KW

Load: Conventional 60Kg/m^2 , Heavy cargo 80Kg/m^2

Power supply: $380\text{V} \pm 10\%$ 50Hz three-phase five-wire system

OPTIONS



Through lifting the body of the telescopic conveyor, to achieve the rapid loading and unloading of different carriages and different heights of goods in the carriages.



To meet the big car different headroom loading and unloading, swing range is large, can reduce the manual handling labor intensity.



Suitable for manual unloading, reduce manual handling intensity, can directly butt climbing conveyor, save equipment installation space at the unloading place.



Increase loading and unloading convenience, personnel can stand on the telescopic conveyor head position for loading and unloading of goods, reduce manual handling intensity.



CHINA POST TECHNOLOGY CO., LTD.

COMPANY HQ: No.3185, Zhongshan North Road, Putuo District, Shanghai
BEIJING BRANCH: No.65, Jiancaicheng West Road, Haidian District, Beijing
SIWUN SUBSIDIARY: No.399, Yuangang Road, Tianhe District, Guangzhou
E'ZHOU BRANCH: Yangye Town, Airport Economic Zone, Ezhou
China Post Siwun R&D and Intelligent Manufacturing Nasha Base:
 No.8, Zhixin 3rd Road, Nansha District, Guangzhou, Guangdong

www.cpte.com/en

info@siwun.cn

+ 86 177 0191 0486

